

SNOWDON RESIDENCE

2711 BRENTWOOD ROAD BEXLEY, OHIO 43209

BEXLEY ARCHITECTURAL REVIEW BOARD PACKET LAST REVISED: SEPTEMBER 13, 2023

CONTENTS

- A ADMINISTRATIVE ITEMS
- B EXISTING CONDITIONS
- C NEIGHBORHOOD SITE CONTEXT
- D SITE PLANS
- E FLOOR PLANS
- F ELEVATIONS + SECTIONS
- G RENDERINGS
- H MATERIALS + PRODUCTS

HOME OWNER: RICK + MARLEE SNOWDON

ARCHITECT: GRA+D ARCHITECTS

CONTRACTOR: DEHLCO CONSTRUCTION

Marlee and Rick Snowdon 326 N Columbia Ave Bexley, OH 43209

August 3, 2023

City of Bexley 2242 E Main St Bexley, OH 43209

Dear All,

Please be advised, that my wife, Marlee Snowdon, and I are the owners of the property located at 2711 Brentwood, and we authorize Andrew Rosenthal / GRA+D Architects to act as our representatives throughout the design approval and building permitting process.



GRA+D ARCHITECTS

221 North 4th Street Columbus, Ohio 43215 614-228-2122 www.grad.cc

05 September 2023

Architectural Review Board 2242 E Main St Bexley, Ohio 43209 (614) 559-4200

The structure located at 2711 Brentwood Avenue cannot be determined to be historically nor architecturally significant. The design is typical for the era in which it was built - however it is not architecturally remarkable. Aspects of the design suggest it may have been an adaptation of a floor plan not originally designed for this site. The architect and builder are not known. Based on records solicited from the Bexley Historical Society - it is not known to have been built for nor occupied by individuals of historical significance.

In studying the possibilities for a renovation vs. a new-build we found multiple factors supporting

- The linear nature of the floorplan and compartmentalization of spaces do not support more contemporary living patterns.
- The Roosevelt façade of the house is particularly ungracious in its relationship to the neighborhood. A combination of factors (the presence of the garage on the lower level here paired with fact that the house is already beyond the allowable setback at this location) make a remedy exceedingly challenging.
- Architecturally the language of the house features low and sloping rooflines expanding the floorplan would require significant reconstruction of the existing roofs to arrive at a satisfactory solution.
- The split-level floor plan makes the house incompatible with contemporary aspirations to age-in-place. The garage's location on a lower level makes this condition particularly
- The existing garage does not offer clearance for the parking of contemporary vehicles. The garage being located under living spaces make this challenge significantly more complex to resolve.
- The existing construction is from an era where energy conservation was not a priority reworking the house to meet contemporary standards, while possible, would be an onerous undertaking yielding less than ideal results.

Our in-house assessment is supported by the attached evaluation provided by Acock Associates Architects. Acock Associates has significant experience doing high-end custom residential design (new-builds and renovations) as well as historic preservation / adaptive reuse projects (including the award-winning renovations to the main library at The Ohio State University).

Andrew Rosenthal, Principal

Page 1 of 1



August 31, 2023

Mr. Andrew Rosenthal **GRA+D Architects** 221 North 4th Street Columbus, Ohio 43209

RE: 2711 Brentwood Avenue, Bexley, Ohio 43209

Dear Andrew,

It was a pleasure walking through and around the 2711 Brentwood Residence. I understand the purpose of this letter is to provide my assessment of whether this residence is a contributing structure to the city of Bexley and deserving of a degree of conservancy.

The structure is a two-story split level that fronts Brentwood Road on the north and Roosevelt Avenue on the west. While the Bexley Historical Society has records of the home's original owner, they have no information on the Architect, Designer, or Constructor, or any information of significance on the home itself. Stylistically, I would classify it as derivative of mid-century modernism. From a formalistic perspective, I do not believe it stands out as particularly innovative for either its time or today. There are some nice elements, the north facing clerestory servicing the south facing living room, but the overall composition, the massing of the one- and two-story elements, and the roof lines are unremarkable. The elevations fronting the public streets seem particularly closed down, containing a random composition of the horizontal ribbon and punched windows with high sills. In my opinion, it does nothing to engage the neighborhood, and its disengagement has little aesthetic payoff.

The construction of the home appears to have been well done, and despite its lack of maintenance in several areas, the home is in relatively good shape. However, like its design, I did not encounter any construction that was particularly innovative for its time or today. The cost of preserving the existing exterior finishes, while bringing the home up to today's energy efficiency standards, will far exceed their

In summary, it is my opinion that the home is not a contributing structure to the neighborhood or the city and does not warrant any degree of conservancy.

Please feel free to call with any questions.

Best Regards,

2711 BRENTWOOD RD | BEXLEY, OH


chell D. Acock All

383 NORTH FRONT STREET COLUMBUS, OHIO 43215 FAX 614/228-2780 614/228-1586



BEXLEY ARB REVIEW



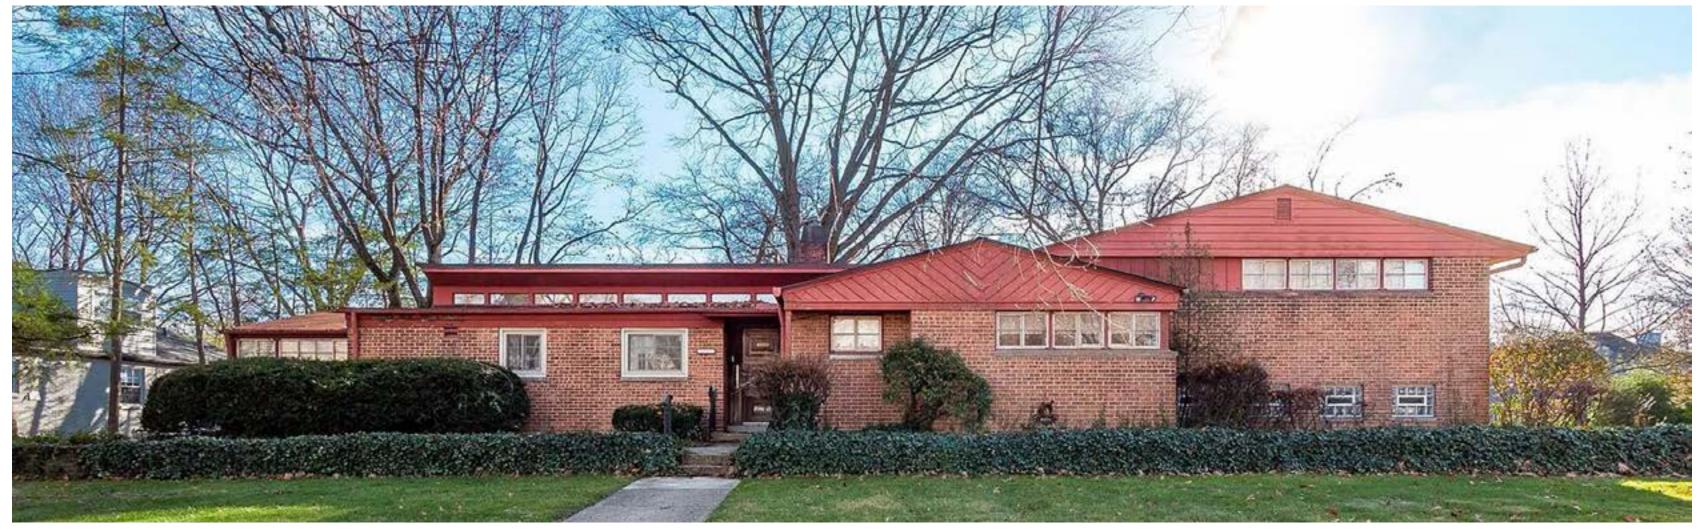

SNOWDON RESIDENCE 2711 BRENTWOOD RD | BEXLEY, OH

EXISTING CONDITION PHOTOS $\mathbf{A} \mid \mathbf{D}$














































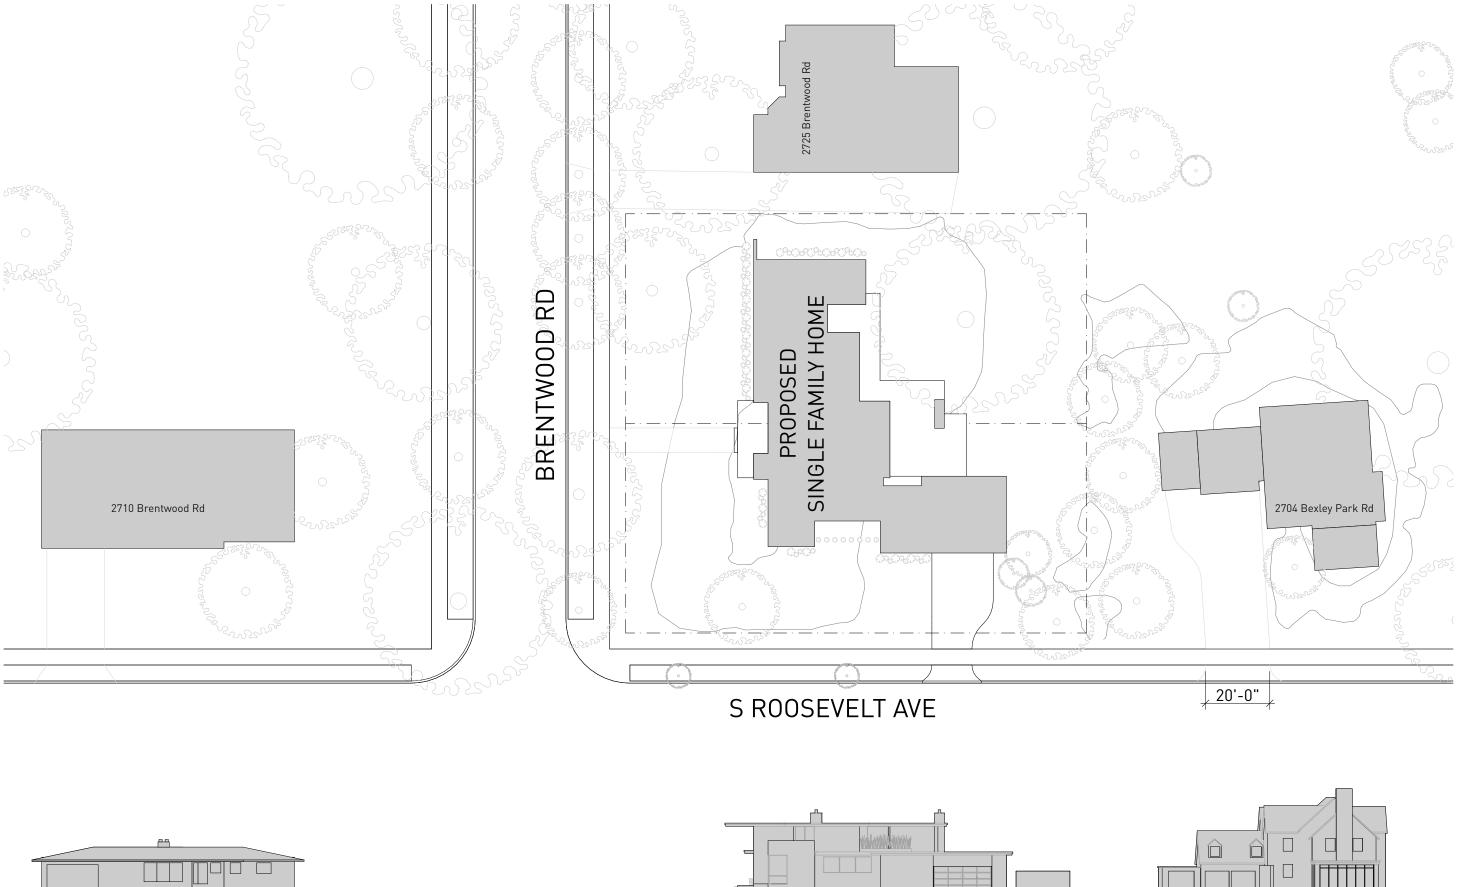


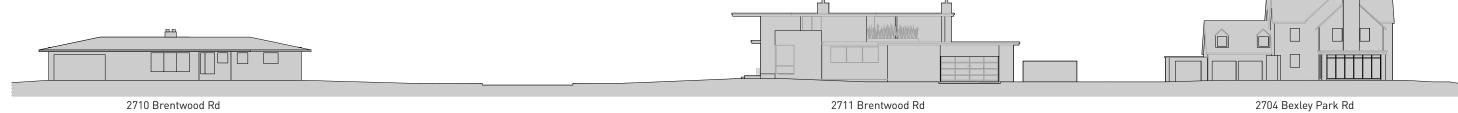




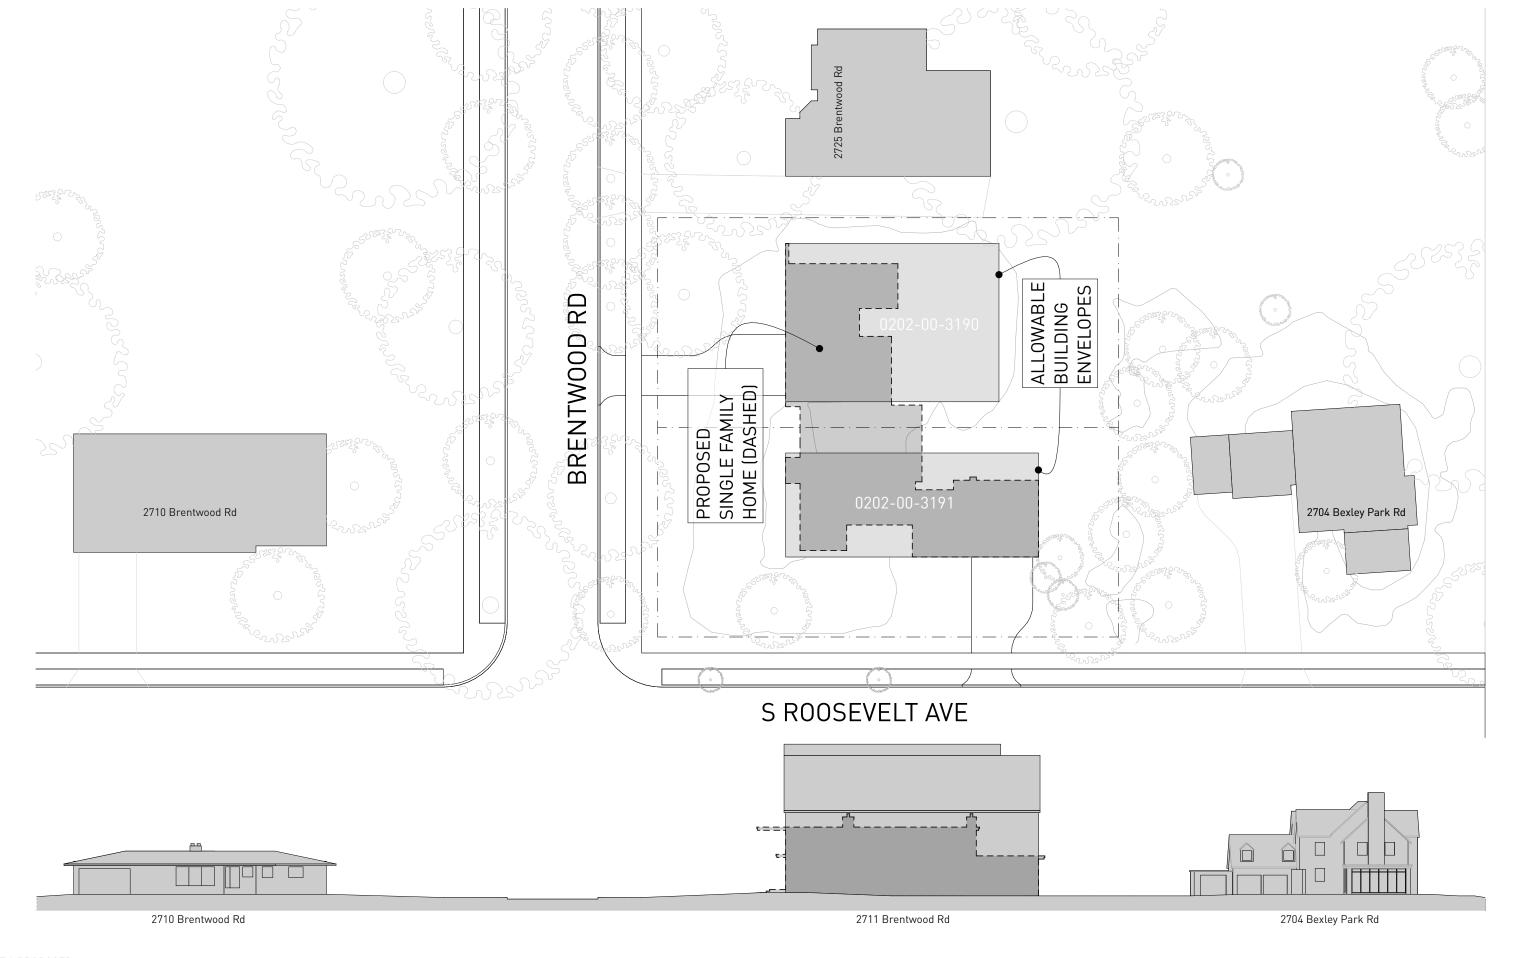


NOTE: THIS IS NOT A PROPOSED DESIGN AND IS MEANT ONLY AS A COMPARATIVE REFERENCE OF A HYPOTHETICAL MAXIMUM STRUCTURE SIZE ACCORDINGING TO SETBACK MAXIMUM ALLOWANCES.




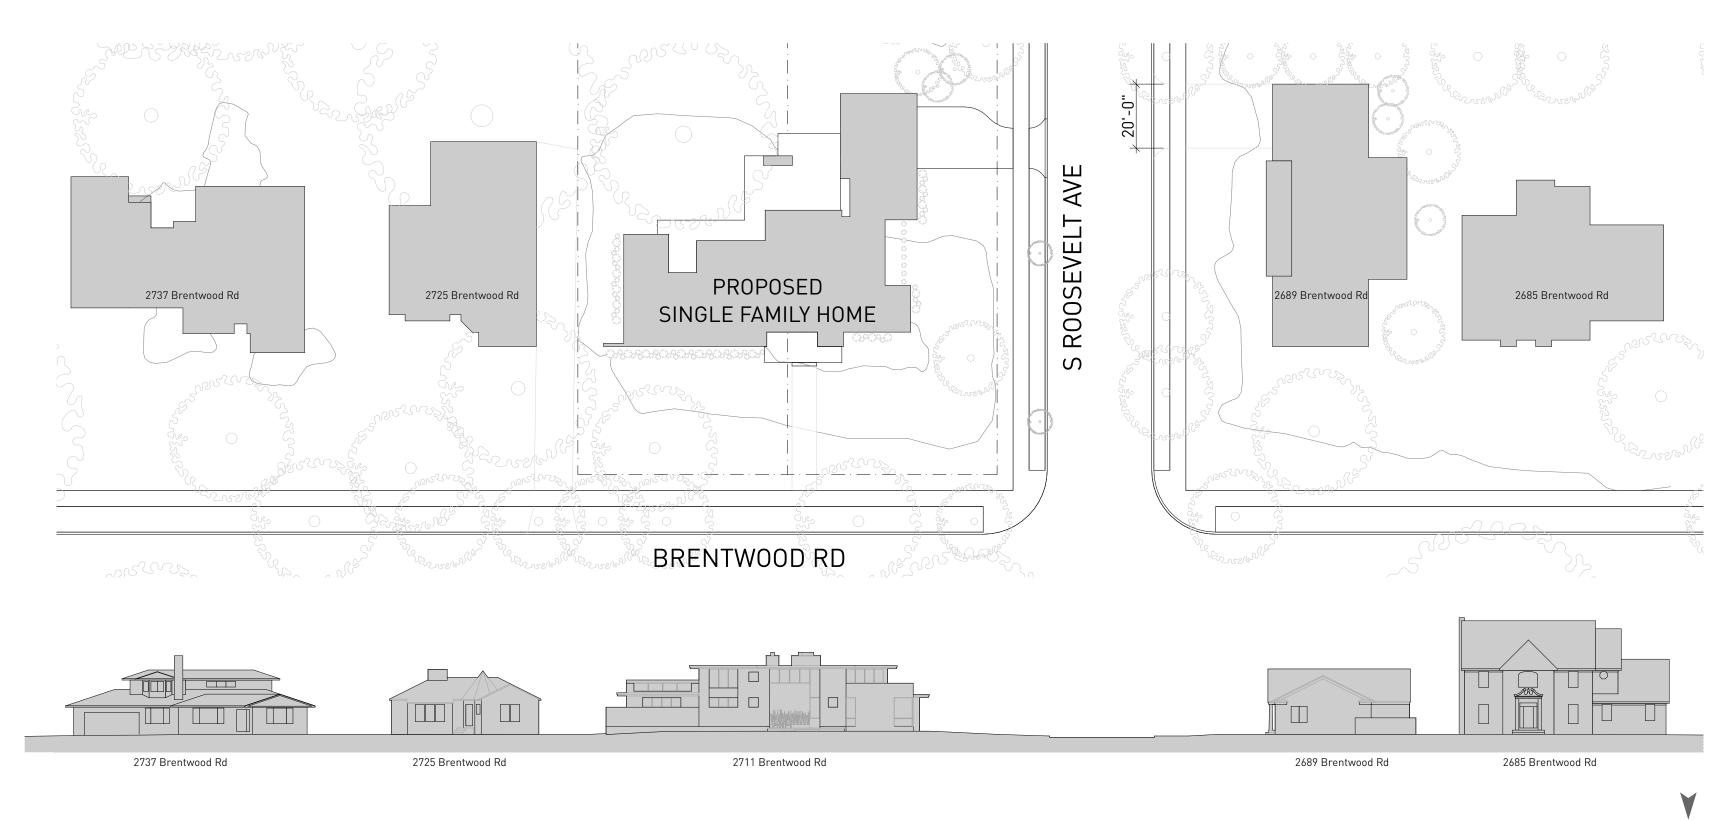

A D

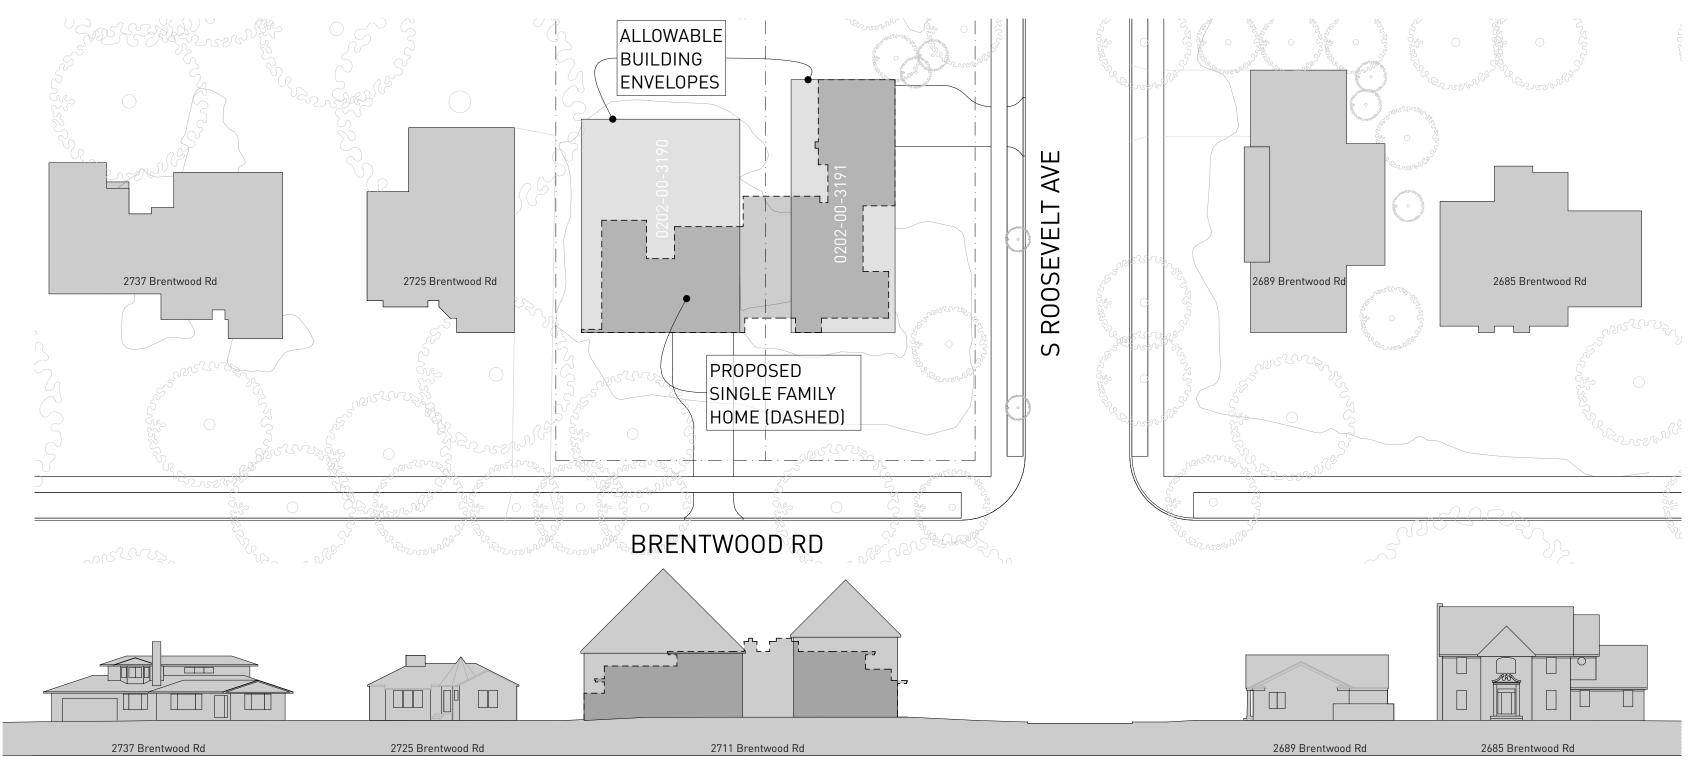


NOTE: THIS IS NOT A PROPOSED DESIGN AND IS MEANT ONLY AS A COMPARATIVE REFERENCE OF A HYPOTHETICAL MAXIMUM STRUCTURE SIZE ACCORDINGING TO SETBACK MAXIMUM ALLOWANCES.




C-07

BEXLEY ARB REVIEW

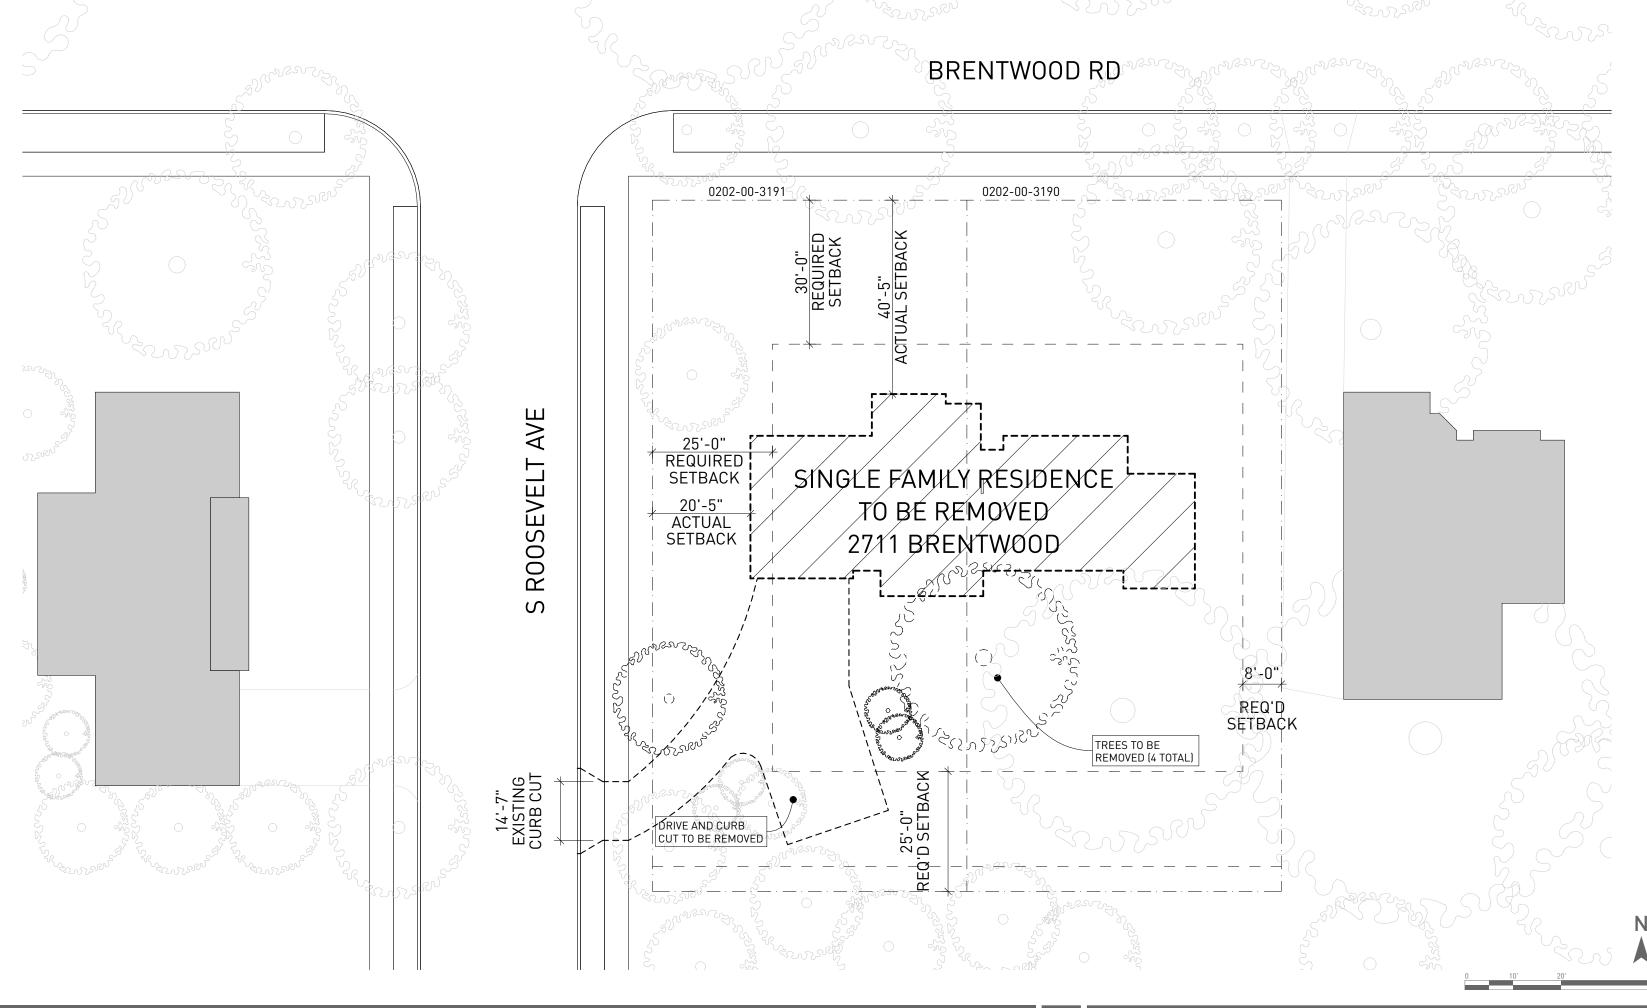

Address: 2711 Brentwood Road Parcel: #020-00-3191 and 0202-00-3190 Roosevelt (West) - 25' (Existing House has 20.4' setback) Brentwood (North) - 30' (Set at 40' to align w/ neighbors) Setbacks: Rear yard (South) - 25' Side yard (East) - 8' Total Area: 18,864sf Coverage: Building Area Allowed - 35% (6,202sf), Proposed Design 5,206sf (28%) Overall - 60% (11,318sf), Proposed Design 5,961sf (32%) Stories Allowed - 2, Proposed Design 2 Stories Height: Height - up to 35' (to mean height of gable roof), Proposed Design 22' **Driveway Cut:** 12.5' max., 25' Proposed to match adjacent propoerties

BRENTWOOD RD

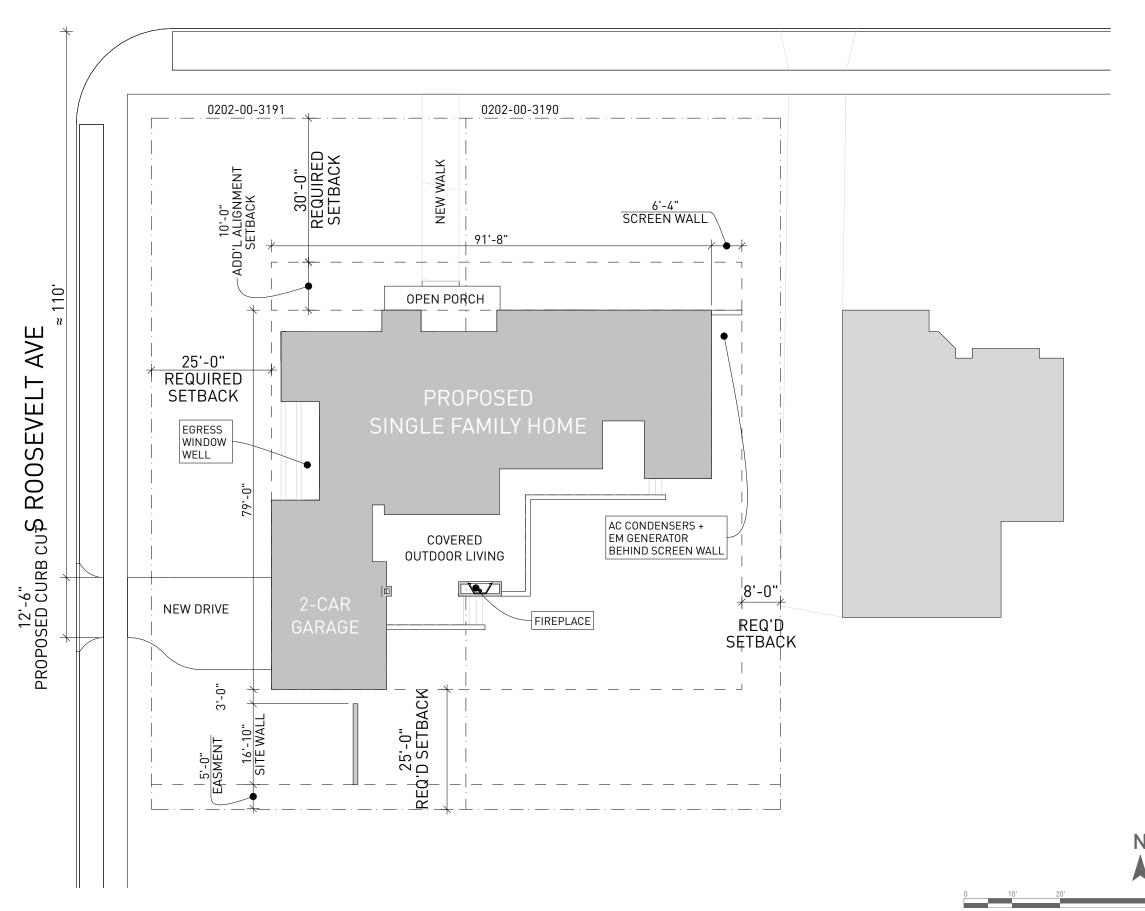


SNOWDON RESIDENCE

GR

PROPOSED SITE PLAN - LOT COVERAGE


D-02

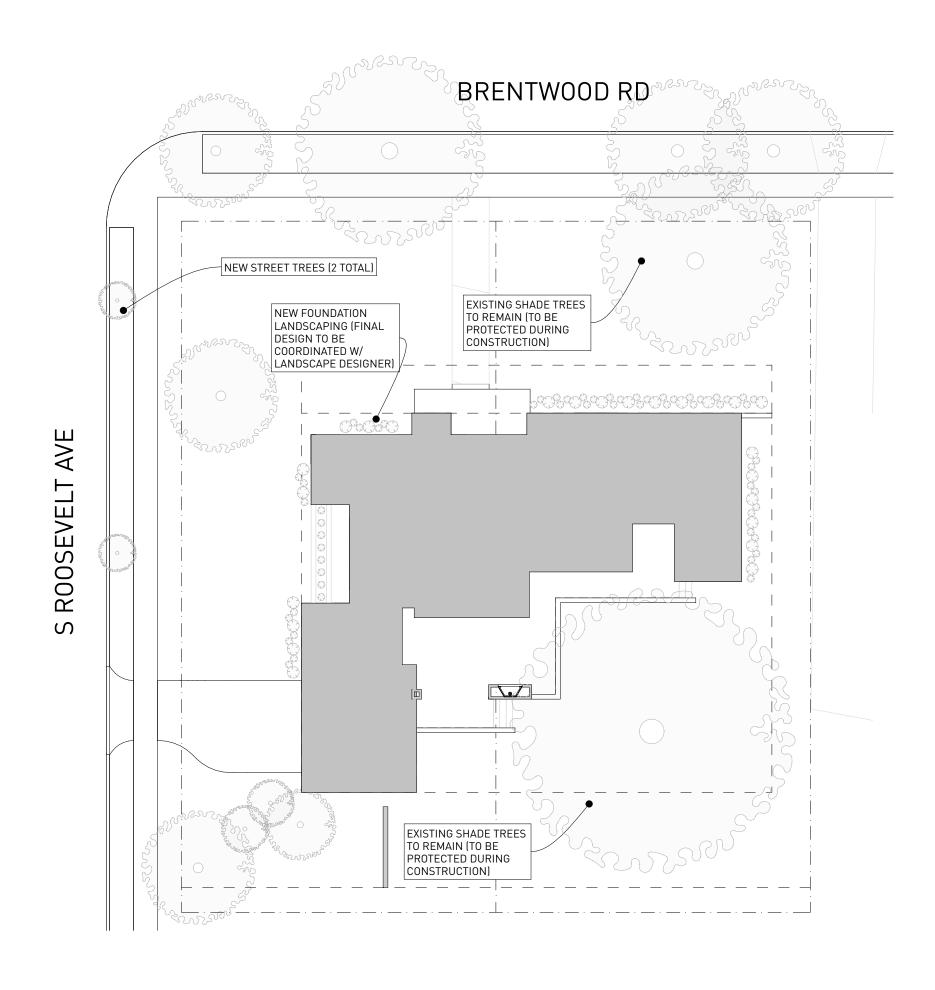


NOTE: THIS IS NOT A PROPOSED FINAL DESIGN, AND FINAL LANDSCAPING PLAN WILL BE SUBMITTED FOR FULL REVIEW.








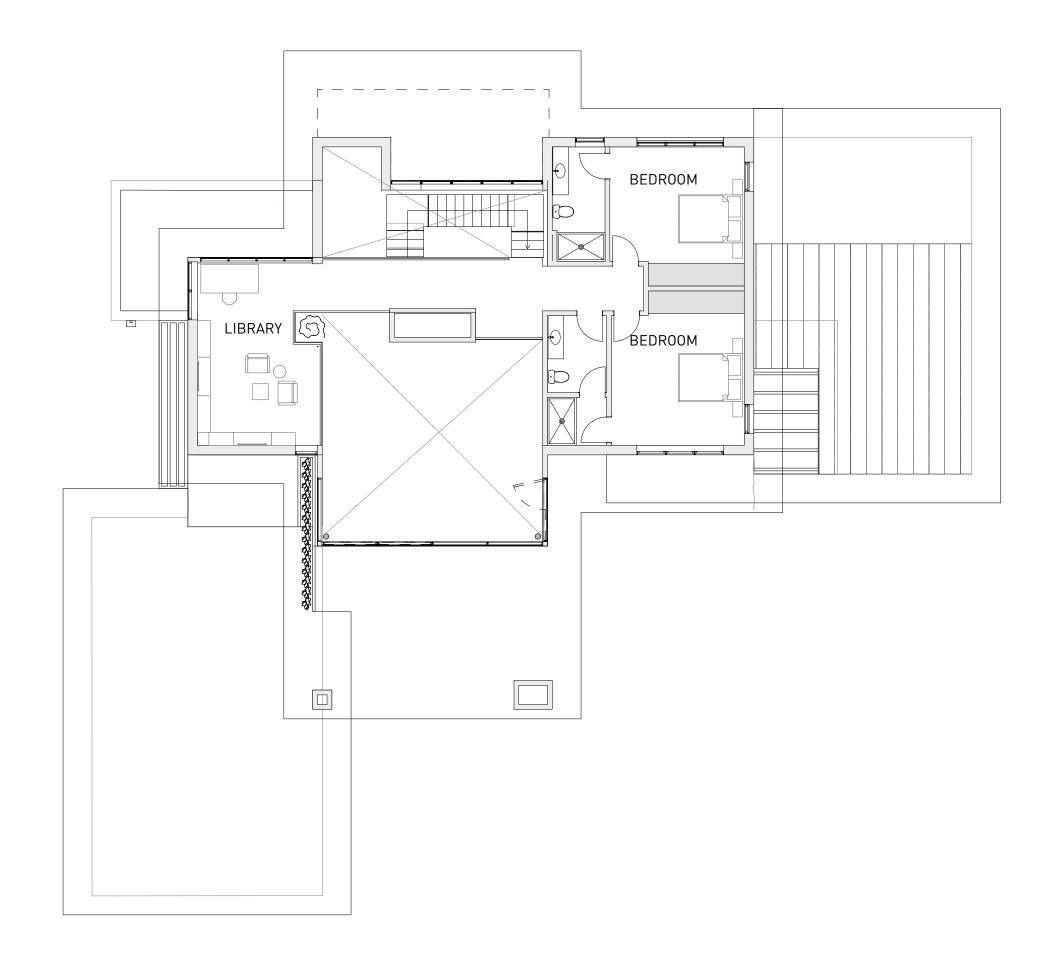





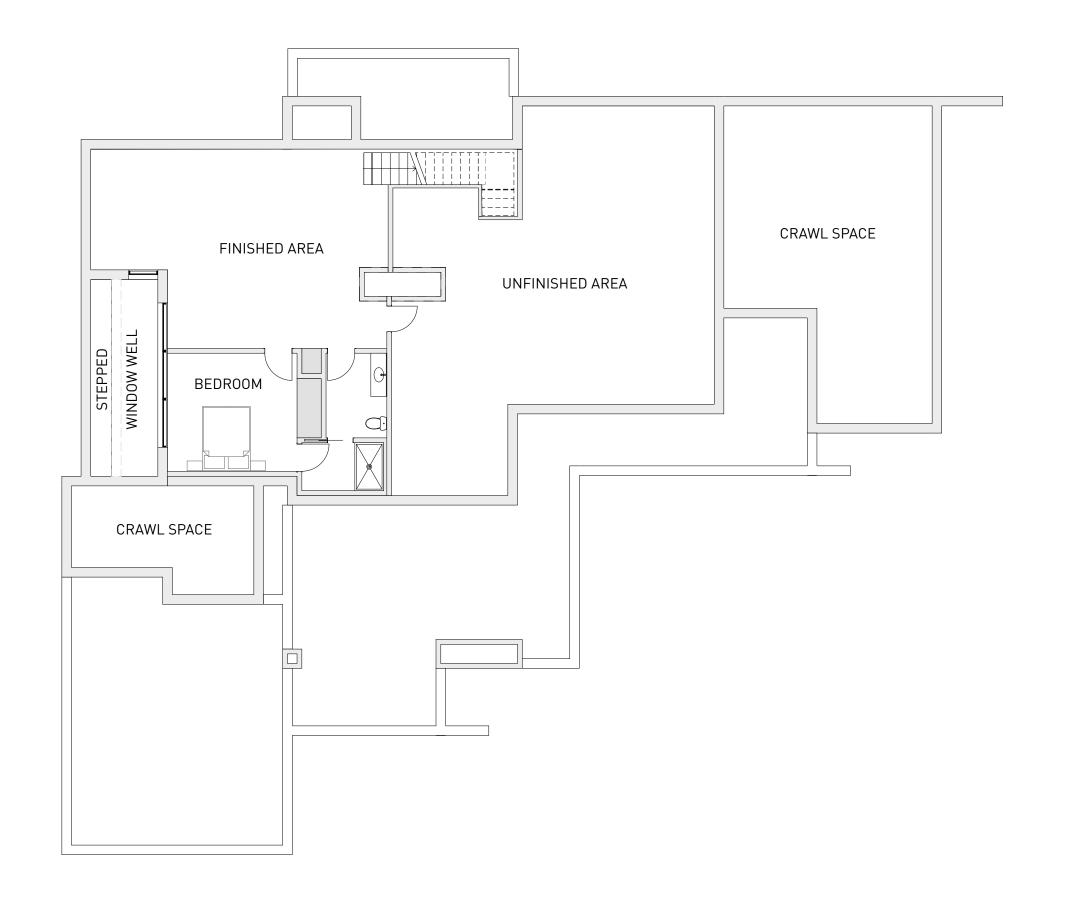




PROPOSED PLAN - LOWER FLOOR

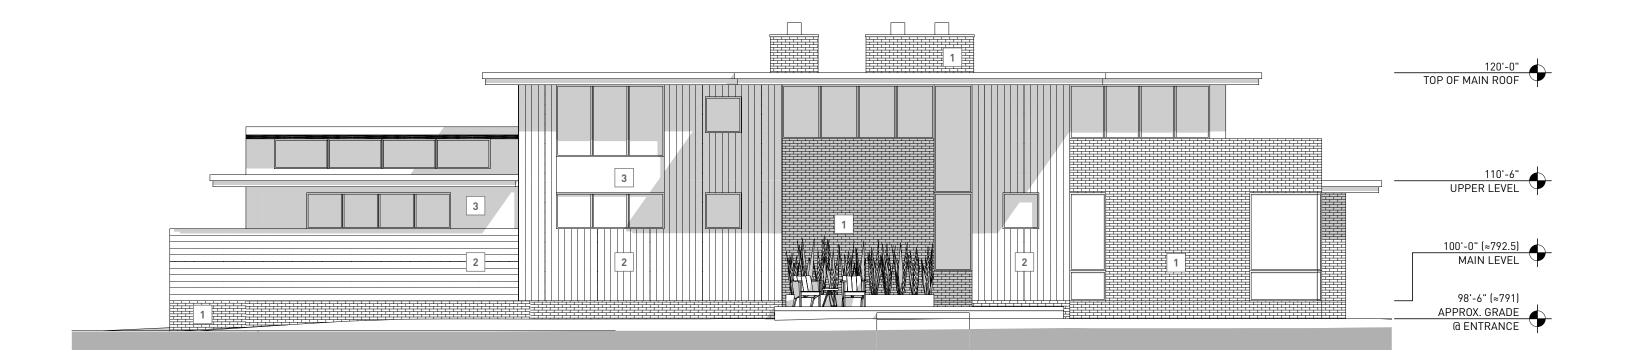


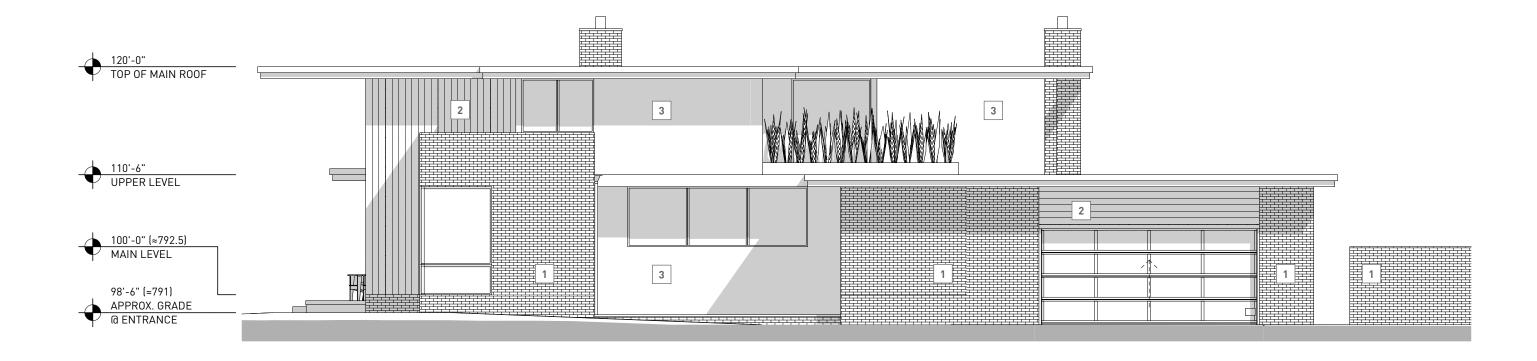




F-02

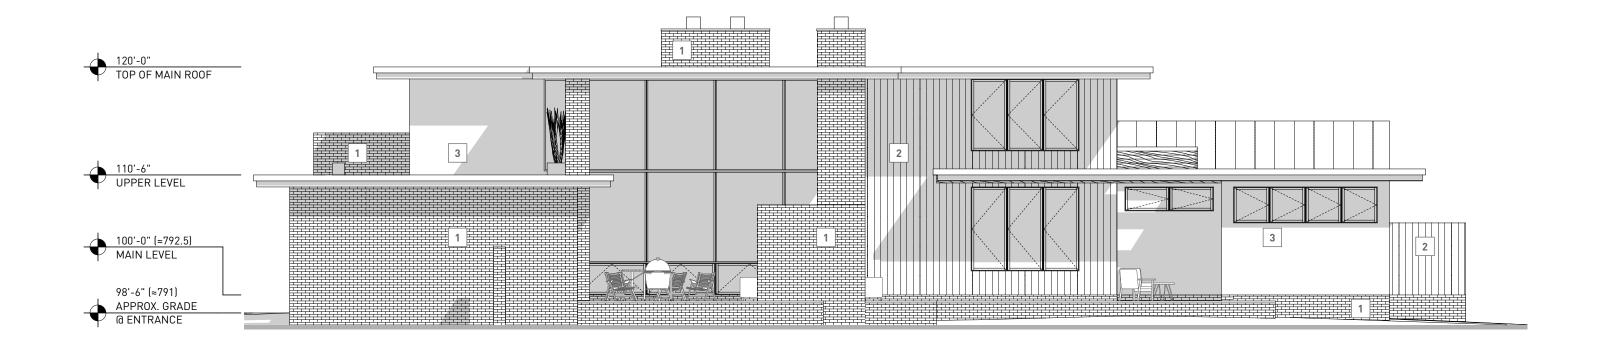

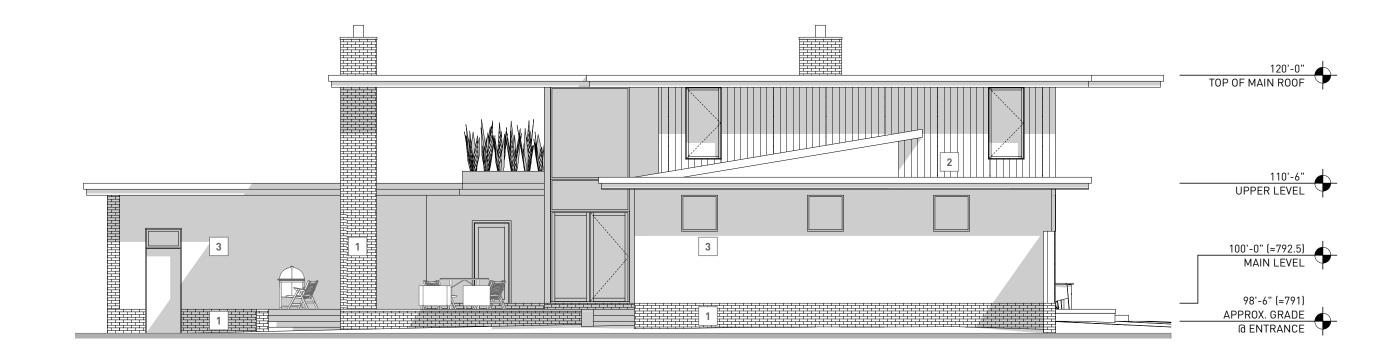


PROPOSED EXTERIOR ELEVATION - EAST

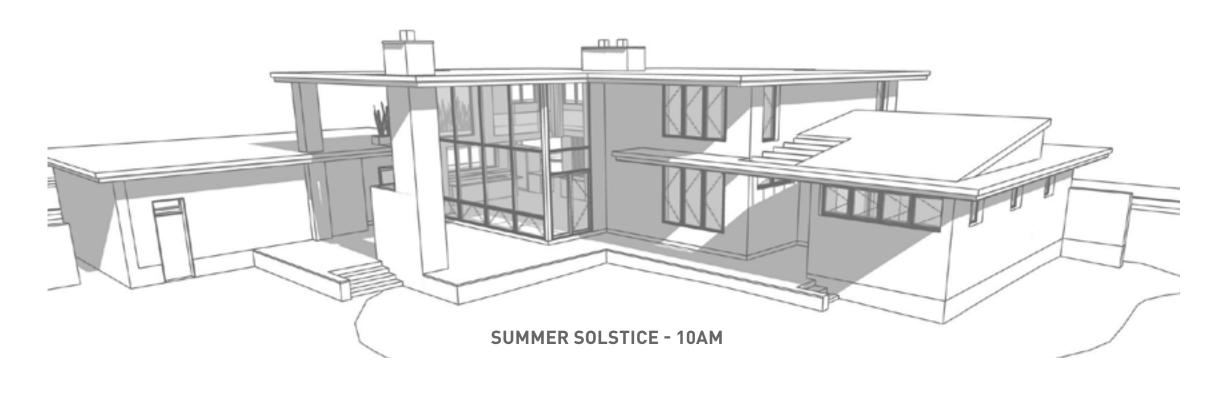





SNOWDON RESIDENCE 2711 BRENTWOOD RD | BEXLEY, OH G R PROPOSED BUILD - SUN STUDIES F-05

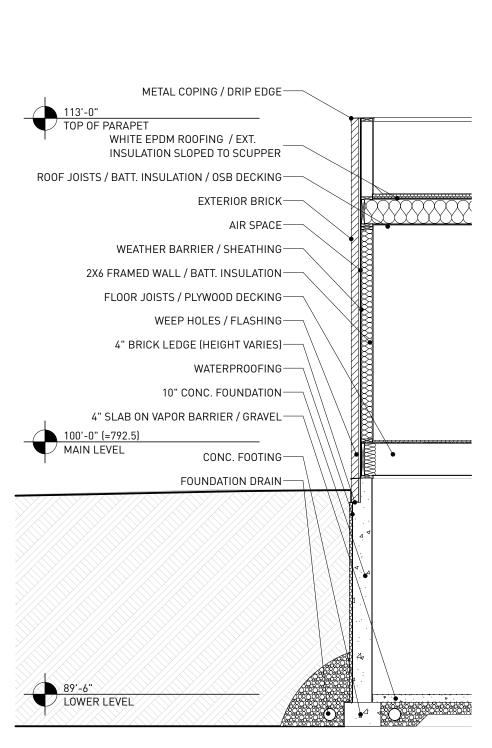

A - SECTION @ DINING ROOM - WEST SCALE 1/4" = 1'-0"

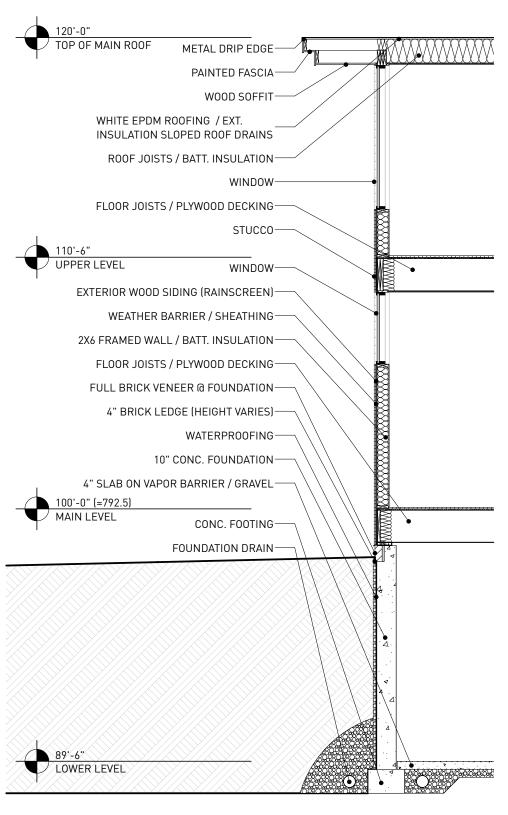

B - SECTION @ MASTER CLOSET - NORTH SCALE 1/4" = 1'-0"

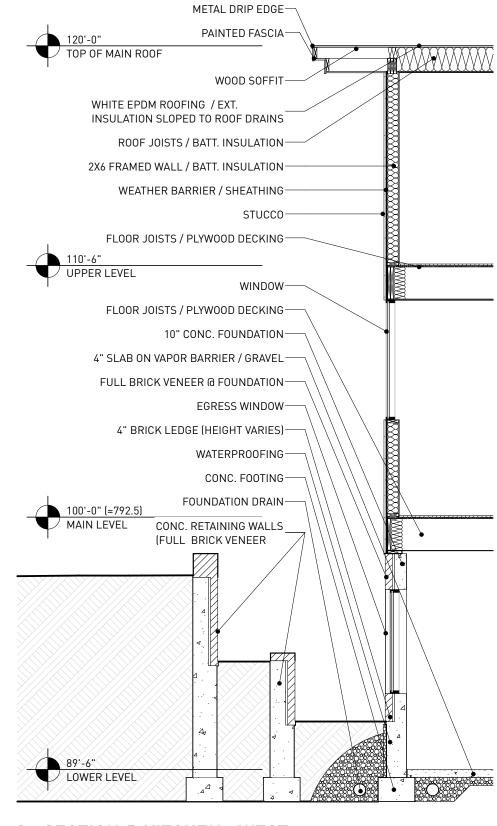

C - SECTION @ KITCHEN - WEST

GR A D







 $\begin{array}{c|c}
\mathbf{G} & \mathbf{R} \\
\mathbf{A} & \mathbf{D}
\end{array}$





[1] BRICK VENEER BLACK DIAMOND VELOUR BELDEN DARK GROUT



[2] WOOD SIDING CLEAR CEDAR BUFFALO LUMBER CO STAINED OLYMPIC 717



[3] STUCCO WHITE SANTA BARBARA FINISH

MATERIAL FINISHES

PROPOSED FINISHES & PRODUCTS

SNOWDON RESIDENCE



VOYAGE SELECT



Elegance, Re-Imagined.







PIVOT SIZING

Panda Windows and Doors is known for creating the largest doors in the industry, Our Voyage Select Contemporary Pivot Doors are no exception. Thanks to our innovative frames and hardware, we can create pivots up to 9ft wide and 18 ft tall with a maximum weight of 750lbs!

When deciding on the size of your new pivot door, it is critical to work with an engineer that specializes in pivot doors like those on our team at Panda. Remember, the larger the door, the closer the pivot point must be to its center to maintain a balanced and smooth operation. When building pivot doors, engineering experience is key to making your new system operate with ease.



HARDWARE OPTIONS



LOCKING MECHANISMS

ROLLER LATCH LOCK
 MULTI-POINT LOCK

MULTI-POINT LOCK
 Most robust lock available.

- Elegant brushed chrome finish.
- Added protection against forced entry.
- Typically a 3-point lock, but up to 2 extra points can be added extra-large doors.



HANDLE OPTIONS


ONE (MINIMAL)

PHOENIX (SLIM)



SEATTLE (MINIMAL)






LADDER PULLS

Ladder pulls are standard on door exteriors but can also be added to the interior upon request. Ladder pulls are available as round or square profiles with chrome or black finishes.

· Ladder Pull - Begins from 4ft up to 7ft.

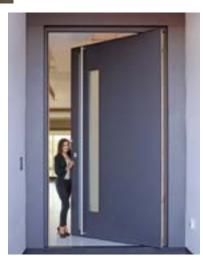





FRONT ENTRY

G R



CASEMENT					WIDTH	HEIGHT
CRANK OUT AND PUSH OUT	1.57	12.1	50	CW-PG50-FW	36"	102"
CRANK OUT AND PUSH OUT	1.57	12.1	50	CW-PG50-FW	40"	96"
CRANK OUT AND PUSH OUT	1.57	12.1	50	CW-PG50-FW	44"	92"
MULL ASSEMBLIES		_	_		WIDTH	HEIGHT
ALL PRODUCTS	1.57	12.1	40	CW-PG40-FW	168"	96"
ALL PRODUCTS	1.57	12.1	40	CW-PG40-FW	96"	168"
AWNING					WIDTH	HEIGHT
CRANK OUT	1.57	12.1	50	CW-PG50-FW	64"	96"
CRANK OUT	1.57	12.1	45	LC-PG45-FW	96"	64"
PUSH OUT	1.57	12.1	45	CW-PG45-FW	96"	64"
CRANK OUT	1.57	12.1	50	CW-PG50-FW	72"	72"
PUSH OUT	1.57	12.1	50	CW-PG50-FW	89"	48"
MULL ASSEMBLIES					WIDTH	HEIGHT
ALL PRODUCTS	1.57	12.1	40	CW-PG40-FW	168"	96"
ALL PRODUCTS	1.57	12.1	40	CW-PG40-FW	96"	168"

FEATURES	MULLING		
Large expanses of glass for maximum views with	Mulled frames are less than 3" wide		
numerous configurations and sizes available	Approximate 3" frame divider simulates a mulled		
Rectangular and polygon shapes	Direct Glaze frame		
Frame recess accepts a drywall return			
Horizontal or vertical ribbon mulling capabilities	CONFIGURATIONS		
Non-certified mulling capabilities	Rectangle/square		
	Isosceles triangle		
GLASS OPTIONS	Right triangle, right or left		
Dual or triple-pane insulated glass	Trapezoid, right or left		
Interior cover depths vary based on glass thickness	 Pentagon		
Argon or Krypton-Argon gas blend	_		
Black spacer and silicone sealant	SIZING		
Low E1, E2, E3, ELR, or ERS glass options	Max frame size certified	141 ³ / ₈ " x 93 ³ / ₈ "	
Specialty glass: frosted, obscure, and gray or bronze tint	Jamb depth	4 1/2"	

NGLE UNIT ERFORMANCE RATINGS		VERTICAL OR HORIZONTAL MUL PERFORMANCE RATINGS	LED UNITS
ir tested to PSF	6.24	Air tested to PSF	1.57
ater tested to PSF	7.5	Water tested to PSF	6.0
erformance grade	CW-PG40-FW	Performance grade	CW-PG40-FW
ax frame size height	93 3/8"	Max frame size height	96"
ax frame size width	141 ³/ ₈ "	Max frame size width	168"
		Max tributary width or height	84"
		THERMAL PERFORMANCE	
		Dual-pane IG low E2 with Argon	0.28 U-Factor

All screens are intentionally designed for uninterrupted views, ease of use, and a sleek modern look.

Pictured right: Modern Awning window
Pictured below: Modern Casement Crank Out window



CASEMENT AND AWNING PUSH OUT

Concealed screen frame does not disrupt sightlines or view	
High transparency mesh	
Innovative latch color matched to the interior	
Concealed hinges support operability	

CASEMENT AND AWNING CRANK OUT

Concealed screen frame does not disrupt sightlines or view	_
High transparency mesh	
Innovative latch color matched to the interior	
Crank in and out operability	


MARVIN SIGNATURE MODERN FINISH: EBONY

WINDOWS

SNOWDON RESIDENCE 2711 BRENTWOOD RD | BEXLEY, OH G | R PROPOSED FINISHES & PRODUCTS H-03

BEXLEY ARB REVIEW

MODERN SWINGING DOOR

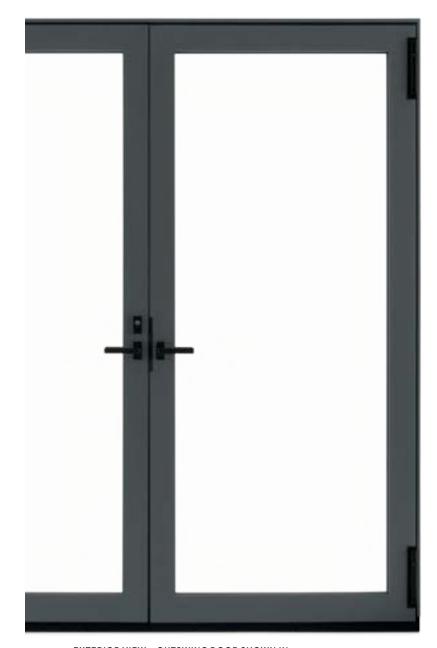

EXTERIOR VIEW – OUTSWING DOOR SHOWN IN GUNMETAL WITH MATTE BLACK HARDWARE



EXTERIOR VIEW – INSWING DOOR SHOWN IN GUNMETAL WITH MATTE BLACK HARDWARE

FEATURES

1 and 2 panel units, inswing and outswing Unequal panel widths Minimalist handles Two 7" square barrel hinges for all door heights Low-profile, performance, and saddle sills

HARDWARE

Minimalist hardware with multi-point lock Sleek design for unobstructed views 7" adjustable hinge

GLASS OPTIONS

Dual or triple-pane insulated glass Argon or Krypton-Argon blend gas Black spacer and dark silicone sealant Low E1, E2, E3, ELR, or ERS glass options

Specialty glass: frosted, obscure, and gray or bronze tint

ADD-ONS

Lock status sensor Retractable screens

PERFORMANCE GRADES

0	Performance Sill	up to CW-PG40-FD
0	Low Profile Sill	up to CW-PG30-FD
O or X	Performance Sill	up to LC-PG40-SHD
O or X	Low Profile Sill	up to LC-PG30-SHD
XO OX XX	Performance Sill	up to LC-PG40-SHD
XO OX XX	Low Profile Sill	up to LC-PG30-SHD

CONFIGURATIONS AND SIZING

Max operator size: 4' x 12'	
Max stationary size: 8' x 12'	
1-2 panel configurations	
Unequal panel widths	
Door to door mulling	

UNIT TYPE	MIN FRAME SIZE UNIT		MAX FRAME SIZE UNIT	
UNI-DIRECTIONAL	WIDTH	HEIGHT	WIDTH	HEIGHT
0	16"	16"	144"	144"
X	20"	49"	48"	144"
OX or XO	34"	49"	173"	144"
XX	38"	49"	96"	144"

O = Stationary Panel X = Operating Panel

* Panel quantity per unit limited to two panels

MARVIN SIGNATURE MODERN FINISH: EBONY

DOORS (TO YARD)

PROPOSED FINISHES & PRODUCTS

Avante® garage doors are designed with architects, contractors and homeowners in mind. With a sleek aesthetic and section seal, these doors are the perfect choice to modernize any home. Not only can they transform garages, they can also be used as an indoor loft partition or as versatile solarium doors. Many glass options are available to control the degree of light transmission and privacy.









STYLE AND CONSTRUCTION

- Aluminum frame provides a virtually maintenance-free, long-lasting door.
- Intellicore® polyurethane insulated rails and stiles. (Model AXII)
- R-value 3.8/U-factor 0.86.
 (Model AXU when glazed with clear insulated glass)
- Many glass and panel options available.
- Section joint seal helps keep out air and water. Integral reinforcing fin provides increased
- strength and longevity. (Available on double car models) Heavy-duty steel ball bearing rollers with
- nylon tires provide quiet operation.

*Doors wider than 14' include built-in reinforcing fin. Standard doors 12' and under do not use built-in reinforcing fin. Usage on widths 12'2" to 14' depend upon glass weight. WiNDCODE® doors may vary. Contact your Clopay Dealer for details. Calculated door section R-value is in accordance with DASMA TDS-163.

BEXLEY ARB REVIEW



FRAME/SOLID PANEL COLOR OPTIONS




Due to the anodizing process.

CUSTOM PAINT OPTIONS





DOOR DESIGNS



HARDWARE Attractive color-matched aluminum grip handles. Available in all standard color options.

FINISH HARDWARE 5YR SARRANTY

GLASS/PANEL OPTIONS



















5/16" clear laminate impact rated glass is available only on AXW8/AXUW8. Acrylic windows require special cleaning. Never use products that contain ammonia or petroleum products to clean acrylic. Please visit

WARRANTIES

Glass available in single pane or insulated (laminated and mirrored glass not available insulated).

Panels can be aluminum to match the aluminum frame. Glass/acrylic panels may be combined with aluminum panels. Custom glass and colors available.


WIND CODE"

Doors available to meet many regional wind load requirements. WwwCode® doors over 16' wide may have reinforcement hardware that shows through the glass panels of the door.



PANEL CONFIGURATIONS (Examples of common sizes shown below)



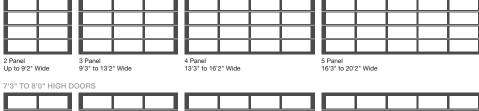

3 Panel 9'3" to 13'2" Wide

4 Panel 13'3" to 16'2" Wide

5 Panel 16'3" to 20'2" Wide



Clopay

RSDR-AVANTEAXSS-19 REV0423

LAST REVISED: AUGUST 10, 2023

Visit <u>clopaydoor.com</u> or call **1-800-2CLOPAY (225-6729)** for more information on Clopay, America's Favorite Garage Doors.





GARAGE DOOR

H-05 **SNOWDON RESIDENCE** GR **PROPOSED FINISHES & PRODUCTS** 2711 BRENTWOOD RD | BEXLEY, OH

A D



Top 10 Reasons to Choose Sure-White® EPDM

Carlisle SynTec Systems' Sure-White EPDM membranes offer an optimal solution for nearly any low-slope roofing situation. Sure-White EPDM is a durable material that has more than 34 years of proven, in-field performance. With significant physical property advantages, cooling benefits in southern climates, and innovations in product technologies, EPDM is still defining the standard in the commercial roofing market. Below are the top 10 reasons to consider Sure-White EPDM on your next roofing project.

TIME TESTED

EPDM is time-tested in real-world conditions. White EPDM roofing systems have been used for more than 34 years.

SUPERIOR WEATHERING RESISTANCE

EPDM has advanced resistance to UV exposure, heat, and mold: » ASTM G155 for Xenon Arc = 25,200 kJ/m² for white EPDM

- » ASTM D573 for heat aging = 68 weeks at 240°F
- » ASTM G21 for fungi = zero (no growth)





THICKNESS

EPDM's nominal 60 or 90 mils of weathering protection is significantly greater than the 20-25 mils over scrim of most plastic-based sheets. Sure-White is also available in 115-or 145-mil FleeceBACK® for added



SUPERIOR HAIL RESISTANCE

Numerous studies and real-world experience confirm that EPDM's 465% elongation (ASTM D412) and weathering resistance result in superior hail damage resistance and UL2218 Class 4 rating. White EPDM remains flexible throughout it's life cycle.

ENERGY EFFICIENT

In southern climates, the solar reflective benefits of white EPDM helps to reduce cooling costs. The cross-linked molecular nature of EPDM can handle the heat of southern climates.

ROOFTOP SAFETY

EPDM's rubber surface provides more grip than white plastic-based membrane, which is important to maintenance personnel.

STABLE

EPDM is the most dimensionally stable membrane, remaining flexible even in extremely cold conditions. Per ASTM D5279-08, EPDM is more flexible at 0°F than TPO at 100°F.

REPAIRABILITY

EPDM rubber doesn't need internal scrim like plastic backed sheets and remains repairable with peel & stick flashings even at the end of its service life.

QUALITY SEAMS

Carlisle's labor-saving Factory-Applied Tape and pressure-sensitive flashings improve the quality and consistency of seams. Electrical seaming equipment consumes natural resources and is dependent on the applicator using correct speed, temperature, and pressure to avoid false or cold welds.

FEWER SEAMS

White EPDM is available in large 16'-wide to 20'-wide sheets for adhered applications, resulting in up to 50% fewer seams compared to 10' wide plastic based membranes.



800-479-6832 | P.O. Box 7000 | Carlisle, PA 17013 | Fax: 717-245-7053 | www.carlislesyntec.com

NOTE: SPECIFIC MANUFACTURER IS SHOWN AS EXAMPLE ONLY AND MAY DIFFER FOLLOWING SAME SPECIFICATIONS


ROOFING - EPDM

SNOWDON RESIDENCE GR **PROPOSED FINISHES & PRODUCTS** 2711 BRENTWOOD RD | BEXLEY, OH BEXLEY ARB REVIEW LAST REVISED: SEPTEMBER 13, 2023 $\mathbf{A} \mid \mathbf{D}$

Seam Cross Section







INTER-LOCK IL20 is an architectural panel which is snapped together during installation. The panel is an integral interlocking system by design which installs in one direction from a given starting point. A double male starter panel is available (for a minimal setup fee) and may be installed in the middle of a roof area to achieve a symmetrical layout. Inter-Lock is a very flexible panel which works well with a wide range of building designs.

Uses & Applications

Product uses include roofs with slopes as low as 3:12, vertical fascia, equipment screens, mansards, and wall panels. This system may also be installed on tapered roof areas.

Advantages

·Factory Applied Non-Curing Sealant - for superior watertightness

Engineered Snap-Together design - for easy installation

·Symmetrical Visual Aesthetics - providing non-directional appearance

·Expansion Clips - allows for thermal expansion and contraction

·Continuous Interlocking Seam - no seam disengagement

·Anti-Siphoning Seam Desgin - prevents water infiltration

*Continuous Roll Formed Lengths - eliminates need for panel lap joints (4' min. panel length)

·Total System Warranties available - for total confidence

Performance Tested

·UL-580 Wind Uplift

·ASTM E1592 Uniform Static Air Pressure

·ASTM E331 Water Penetration

·ASTM E283 Air Leakage

Please consult DMI for applicability of test reports for your project.

SNOWDON RESIDENCE



Expansion Clip

800.828.1510 • www.dmimetals.com • sales@dmimetals.com

PROVEN. DEPENDABLE. SUSTAINABLE.



Project Name: _ Architect: Installing Contractor: ___ **General Contractor: Specification Section:**

Stiffener Profile

Clip

Expansion



Panel Width 18" (17.75") Substrate O.032 Aluminum O.040 Aluminum Embossed: Custom Color: *Premium Colors subject to minimum quantities, extended lead times and upcharges. Consult DMI for details Warranty Finish

O 24 ga. Galvalume® O 16 oz. Copper 22 ga. Galvalume® 20 oz. Copper Consult DMI for minimum quantities, upcharges, set up fees and extended lead times Standard Finishes (N/A on Mill Finishes) O DynaClad® PVDF Acrylic Coated Galvalume (Acrylume®) Clear Anodized Aluminum Premium Finishes* O DynaClad® Metallic PVDF: O DynaClad® Brite Red PVDF O DynaClad® Cobalt Blue PVDF O DynaClad® Standard Color PVDF w/ Clearcoat: O DynaClad® Premium Color PVDF w/ Clearcoat:

O DynaClad® Paint Finish

Galvalume® 20 Year - 6 Month (Substrate)

Aluminum Sheet 2 Year (Substrate)

O DynaClad® Metal Roofing System:

O DynaClad® Metal Roofing System NDL:

Double Male Panel is not available in Metallic Colors.

Custom Colors Available

Since 1988 Dimensional Metals, Inc. (DMI) has specialized in the manufacturing of architectural metal roof and wall panel systems as well as fabricated architectural sheet metal for the construction industry. We are backed by decades of proven metal envelope design, dependable Technical Field Services, and an Engineering Department delivering sustainable solutions. You are sure to find the product that will best enhance your design.

> NOTE: SPECIFIC MANUFACTURER IS SHOWN AS EXAMPLE ONLY AND MAY DIFFER FOLLOWING SAME SPECIFICATIONS

ROOFING - STANDING SEAM

GR

Colors shown are samples and may vary slightly from actual material. Please consult DMI Color Chart for stocking color availability. †Metallic colors are directionally sensitive and therefore entire roof areas should be ordered at once time to ensure uniformity.

PROPOSED FINISHES & PRODUCTS



TECHNICAL BULLETIN - PRODUCT SIZE INFORMATION

Trim


5/8 Trii	m Sizes	1X Trir	n Sizes	5/4 Trii	m Sizes	2X Trin	n Sizes
Nominal	Actual	Nominal	Actual	Nominal	Actual	Nominal	Actual
_	_	_	_	_	_	2 x 2	1 ½" x 1 ½"
_	_	1 x 3	3/4" x 2 1/2"	5/4 x 3	1" x 2 ½"	_	_
5/8 x 4	5/8" x 3 ½"	1 x 4	34" x 3 ½"	5/4 x 4	1" x 3 ½"	2 x 4	1 ½" x 3 ½"
_	_	1 x 5	3/4" x 4 1/2"	5/4 x 5	1" x 4 ½"	_	_
5/8 x 6	5/8" x 5 ½"	1 x 6	34" x 5 ½"	5/4 x 6	1" x 5 ½"	2 x 6	1 ½" x 5 ½"
5/8 x 8	5/8" x 7 1/4"	1 x 8	3/4" x 7 1/4"	5/4 x 8	1" x 7 1/4"	2 x 8	1 ½" x 7 ¼"
5/8 x 10	5/8" x 9 1/4"	1 x 10	3/4" x 9 1/4"	5/4 x 10	1" x 9 1/4"	2 x 10	1 ½" x 9 ¼"
5/8 x 12	5/8" x 11 1/4"	1 x 12	3/4" × 11 1/4"	5/4 x 12	1" x 11 1/4"	2 x 12	1 ½" x 11 ¼"


Note: All TruExterior® Products are available in standard 16' lengths. 12' and 20' lengths are also available in 4/4, 5/4 and 2x Trim.

Beadboard

Single Beadboard				
Nominal Size	Actual Thickness (A)	Actual Width (B)	Reveal (C)	Tongue (E)
5/8 x 4	0.625"	3.50"	3.16"	0.34"
5/8 x 6	0.625"	5.25"	4.91"	0.34"

Double Beadboard				
Nominal Size	Actual Thickness (A)	Actual Width (B)	Reveal (C)	Tongue (D)
5/8 x 8	0.625"	6.50"	6.16"	0.34"
5/8 x 12	0.625"	10.25"	9.91"	0.34"





1. Certificates and Listings

- a. Cal Fire (WUI): CA SFM 12-7A-1 Listing No. 8140-2134:0101
- b. Pre-consumer Recycled Content: SCS Global Certification Minimum 70%

2. Properties

- a. Density: ASTM C 1185, 40-50 lb/ft3
- b. Flexural Strength: ASTM C 1185, > 1600 psi
- c. Coefficent of Linear Expansion: ASTM D 6341, < 0.000014 in / (n*oF)
- d. Impact Resistance: ASTM D 6110, > 60 in.

3. Performance

- a. Fungi Rot: AWPA E10, Brown Rot-Negligible Loss, White Rot-Negligible Loss
- b. Termite Resistance: AWPA E1, > 9.0
- c. Water Absorption: ASTM D 570, < 1.5%
- d. Flame Spread: ASTM E 84, < 200

4. Manufacturing Tolerences

- a. Width: ± 1/16 in.
- b. Thickness: ± 1/16 in.
- c. Length: +2.0 / -0.0 in.


BORAL BUILDING PRODUCTS ©2018 Boral Building Products Inc.

1/2017




Accessories


Skirt Board					
Nominal Size	Actual Thickness (A)	Actual Width (B)			
1 x 6	0.75"	5.50"			
1 x 8	0.75"	7.25"			
5/4 x 6	1.0"	5.50"			
5/4 x 8	1.0"	7.25"			



Plowed Fascia				
Nominal Size	Actual Thickness (A)	Actual Width (B)	Distance to Edge (C)	Pocket (P' x P")
1 x 6	0.75"	5.50"	0.625"	0.375" x 0.5"
1 x 8	0.75"	7.25"	0.625"	0.375" x 0.5"




Rabbeted Trim with Window Pocket				
Nominal Size	Actual Thickness (A)	Actual Width (B)	Window Pocket (W' x W")	
5/4 x 4	1.0"	3.50"	0.187" x 1.88"	
5/4 x 6	1.0"	5.50"	0.187" x 1.88"	
5/4 x 8	1.0"	7.25"	0.187" x 1.88"	




Size	Inickness (A)	vviatn (B)	(VV X VV")	(S' X S")
5/4 x 4	1.0"	3.50"	0.187" x 1.88"	0.75" x 0.75"
5/4 x 6	1.0"	5.50"	0.187" x 1.88"	0.75" x 0.75"
5/4 x 8	1.0"	7.25"	0.187" x 1.88"	0.75" x 0.75"
L			B	

Rabbeted Trim with Window and Siding Pocket

Nominal Actual Window Pocket Siding Pocket



Rabbeted Trim with Siding Pocket				
Nominal Size	Actual Actual Thickness (A) Width (B)		Siding Pocket (S' x S")	
5/4 x 3	1.0"	2.50"	0.75" x 0.75"	
5/4 x 4	1.0"	3.50"	0.75" x 0.75"	
5/4 x 5	1.0"	4.50"	0.75" x 0.75"	
5/4 x 6	1.0"	5.50"	0.75" x 0.75"	
5/4 x 8	1.0"	7.25"	0.75" x 0.75"	





©2018 Boral Building Products Inc.

SIDING + TRIM

H-08

GR

PROPOSED FINISHES & PRODUCTS



Caliber

Outdoor Wall Sconce 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
O WS-W36614 14" - 2 Lights	○ 3000K 90	21W	1140	O AL Brushed Aluminum O BK Black O BZ Bronze

Example: WS-W36614-BZ

For custom requests please contact customs@waclighting.com

DESCRIPTION

Light projection tuned with precision.

FEATURES

- Discrete cylinder with minimal mounting hardware
- Weather-resistant powder coated finish
- WS-W36614 is Up & down light, WS-W36610 is one direction
- Light engine is factory sealed for maximum protection from the elements
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

3000K Color Temp: 120-277V,50/60Hz Input: 90 CRI: ELV: 100-10% Dimming: 72000 Hours Rated Life: Can be mounted on wall in all orientations Mounting: ETL, cETL,IP65 Standards: Wet Location Listed Aluminum hardware with lens diffuser Construction:



Fixture Type:


Project:

Location:

Catalog Number:



LINE DRAWING:

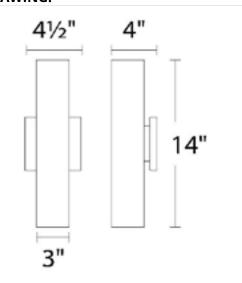

WS-W36614

LIGHT FIXTURES

SNOWDON RESIDENCE

PROPOSED FINISHES & PRODUCTS

GR



SNOWDON RESIDENCE