



614-224-2345 2030 Dividend Drive Columbus, OH 43228

Endure EN600 Series 601 - Double Hung





SIZING

Opening Width Range: 53 1/4" to 53 1/2"

Opening Height Range: 50 1/4" to 50 1/2"
Window Size: 53" x 50"

United Inches: 103

Egress Size: 48" x 18 5/32" Egress Square Foot: 6.0605

Egress Meets Criteria: No

Top Sash Size: 49" x 23 9/16"

Top Glass Size: 47 3/16" x 21 13/16" x 3/4"
Top Glass Viewable Size: 46 3/16" x 20 13/16"

Top Glass Viewable Size: 46 3/16" x 20 13/16 Bottom Sash Size: 50" x 24 9/16"

Bottom Glass Size: 47 3/16" x 21 13/16" x 3/4" Bottom Glass Viewable Size: 46 3/16" x 20 13/16"

Bottom Screen: 49 1/2" x 25"

Structural

N/A

ENERGY ENERGY PERFORMANCE RATINGS

U-Factor (U.S/I-P)

Solar Heat Gain Coefficient

0.27

0.28

ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Condensation Resistance

0.54

60.00

Air Infiltration (cfm/ft2)

<= 0.05

CPD: PRD-N-101-01633-00001

STC: 25; OITC: 22; Acoustic Test Report: f2964.01-113-11

QUOTE INFORMATION

Job: Gocken, Charlie

Tag: Dh 1

Qty: 8

DETAILS

Endure Window - EN600 Series

601 - Double Hung

Beige

Exact Size: 53" x 50"

Constant Force Roller Tilt Balance System

Snap-In Frame Sash Stops

Double Profile DA Locks

Beige Vent Locks

Beige Hardware

INNERGY Thermal Sash Reinforcement

Extruded Bottom Screen (Beige) with BetterVue Screen

Mesh

Graphite Foam Insulation

Sill Extender

ComforTech DLA

Single Strength Glass


3/4" IG Thickness


Sell Price: \$9,088.00 (\$1,136.00 per one)



614-224-2345 2030 Dividend Drive Columbus, OH 43228

Endure EN600 Series 601 - Double Hung





SIZING

Opening Width Range: 37 1/4" to 37 1/2" Opening Height Range: 37 1/4" to 37 1/2"

Window Size: 37" x 37" United Inches: 74

Egress Size: 32" x 13 1/32"

Egress Square Foot: 2.9015 Egress Meets Criteria: No

Top Sash Size: 33" x 17 1/16"

Top Glass Size: 31 3/16" x 15 5/16" x 3/4"

Top Glass Viewable Size: 30 3/16" x 14 5/16" Bottom Sash Size: 34" x 18 1/16"

Bottom Glass Size: 31 3/16" x 15 5/16" x 3/4"

Bottom Glass Viewable 30 3/16" x 14 5/16"

Bottom Screen: 33 1/2" x 18 1/2"

Structural

0.05 cfm/ft2 @ 1.57 psf

ASTM E 283

Water: 7.52 psf **ASTM E 547**

Structural: LC-PG50 141mph

AAMA/WDMA/CSA 101/I.S.2/A440-08 and 11 DP 50

ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S/I-P) Solar Heat Gain Coefficient

0.27 0.28

ADDITIONAL PERFORMANCE RATINGS

0.54 60.00

Air Infiltration (cfm/ft2)

<= 0.05

CPD: PRD-N-101-01633-00001

STC: 25; OITC: 22; Acoustic Test Report: f2964.01-113-11

OUOTE INFORMATION

Job: Gocken, Charlie

Tag: Dh 2

Qty: 2

DFTAILS

Endure Window - EN600 Series

601 - Double Hung

Beige

Exact Size: 37" x 37"

Constant Force Roller Tilt Balance System

Snap-In Frame Sash Stops Double Profile DA Locks

Beige Vent Locks

Beige Hardware

INNERGY Thermal Sash Reinforcement

Extruded Bottom Screen (Beige) with BetterVue Screen

Mesh

Graphite Foam Insulation

Sill Extender

ComforTech DLA

Single Strength Glass


3/4" IG Thickness


Sell Price: \$1,858.00 (\$929.00 per one)



614-224-2345 2030 Dividend Drive Columbus, OH 43228

Endure EN600 Series 601 - Double Hung

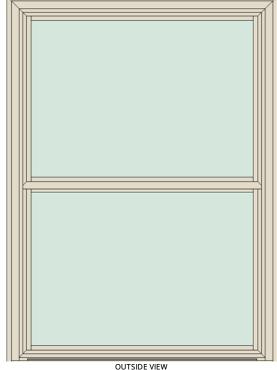

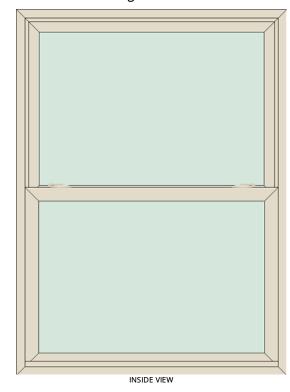

SIZING

Opening Width Range: 37 1/4" to 37 1/2" Opening Height Range: 50 1/4" to 50 1/2"

> Window Size: 37" x 50" United Inches: 87

Egress Size: 32" x 19 17/32"

Egress Square Foot: 4.3459 Egress Meets Criteria: No

Top Sash Size: 33" x 23 9/16"

Top Glass Size: 31 3/16" x 21 13/16" x 3/4"

Bottom Glass Size: 31 3/16" x 21 13/16" x 3/4"

Top Glass Viewable Size: 30 3/16" x 20 13/16" Bottom Sash Size: 34" x 24 9/16"

Bottom Glass Viewable 30 3/16" x 20 13/16"

Size:

Bottom Screen: 33 1/2" x 25"

Structural

Air: 0.05 cfm/ft2 @ 1.57 psf

ASTM E 283

Water: 7.52 psf **ASTM E 547**

Structural: LC-PG50 141mph

AAMA/WDMA/CSA 101/I.S.2/A440-08 and 11 **DP 50**

ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S/I-P) Solar Heat Gain Coefficient

0.27 0.28

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.54

60.00

Air Infiltration (cfm/ft2)

<= 0.05

CPD: PRD-N-101-01633-00001

STC: 25; OITC: 22; Acoustic Test Report: f2964.01-113-11

QUOTE INFORMATION

Job: Gocken, Charlie

Tag: Dh 3

Qty: 4

DFTAILS

Endure Window - EN600 Series

601 - Double Hung

Beige

Exact Size: 37" x 50"

Constant Force Roller Tilt Balance System

Snap-In Frame Sash Stops

Double Profile DA Locks

Beige Vent Locks

Beige Hardware

INNERGY Thermal Sash Reinforcement

Extruded Bottom Screen (Beige) with BetterVue Screen

Mesh

Graphite Foam Insulation

Sill Extender

ComforTech DLA

Single Strength Glass


3/4" IG Thickness


Sell Price: \$4,068.00 (\$1,017.00 per one)



614-224-2345 2030 Dividend Drive Columbus, OH 43228

Endure EN600 Series 601 - Double Hung

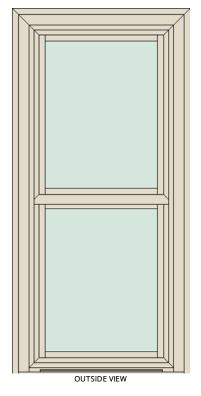

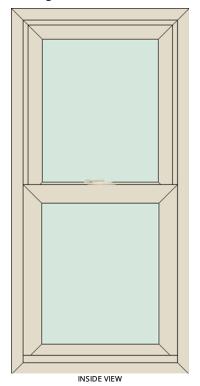

SIZING

Opening Width Range: 18 1/4" to 18 1/2" Opening Height Range: 37 1/4" to 37 1/2"

Window Size: 18" x 37"

United Inches: 55

Egress Size: 13" x 13 1/32"

Egress Square Foot: 1.1787

Egress Meets Criteria: No

Top Sash Size: 14" x 17 1/16"

Top Glass Size: 12 3/16" x 15 5/16" x 3/4"

Top Glass Viewable Size: 11 3/16" x 14 5/16"

Bottom Sash Size: 15" x 18 1/16"

Bottom Glass Size: 12 3/16" x 15 5/16" x 3/4"

Bottom Glass Viewable 11 3/16" x 14 5/16"

Size:

Bottom Screen: 14 1/2" x 18 1/2"

Structural

Air:

0.05 cfm/ft2 @ 1.57 psf

ASTM E 283

Water: 7.52 psf

7.52 psf ASTM E 547

Structural:

LC-PG50 141mph AAMA/WDMA/CSA 101/I.S.2/A440-08 and 11 DP 50

ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S/I-P) Solar Heat Gain Coefficient

0.27

0.28

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance Condensati

0.54

60.00

Air Infiltration (cfm/ft2)

<= 0.05

CPD: PRD-N-101-01633-00001

STC: 25; OITC: 22; Acoustic Test Report: f2964.01-113-11

QUOTE INFORMATION

Job: Gocken, Charlie

Tag: Dh 4

Qty: 5

DETAILS

Endure Window - EN600 Series

601 - Double Hung

Beige

Exact Size: 18" x 37"

Constant Force Roller Tilt Balance System

Snap-In Frame Sash Stops Single Passive Sweep Lock

Beige Vent Locks

Beige Hardware

INNERGY Thermal Sash Reinforcement

Extruded Bottom Screen (Beige) with BetterVue Screen

Mesh

Graphite Foam Insulation

Sill Extender

ComforTech DLA

Single Strength Glass

3/4" IG Thickness

Sell Price: \$4,645.00 (\$929.00 per one)


INFORMATION AND WARNINGS


Double Hung windows less than 19 3/8" in width have a single Profile DA sweep lock and low profile tilt latches. These are different than the double Profile DA locks and latch assemblies on larger Double Hung windows.



614-224-2345 2030 Dividend Drive Columbus, OH 43228

Endure EN600 Series 604 - 3-Lite Slider (1/4-1/2-1/4)





OUTSIDE VIEW

INSIDE VIEW

SIZING

Opening Width Range: 91 1/4" to 91 1/2" Opening Height Range: 48 1/4" to 48 1/2" Window Size: 91" x 48" United Inches: 139

Egress Size: 39 5/8" x 42 9/16"

Egress Size (Fixed Center): 21 5/16" x 42 9/16"

Egress Square Foot: 6.2994 Egress Meets Criteria: Yes

> Left Sash Size: 22 13/16" x 43 5/8" Left Glass Size: 21 1/16" x 41 7/8" x 3/4"

Left Glass Viewable Size: 20 1/16" x 40 7/8" Center Sash Size: 42 7/8" x 43 5/8"

Center Glass Size: 41 1/8" x 41 7/8" x 3/4"

Center Glass Viewable Size: 40 1/8" x 40 7/8"

Right Sash Size: 22 13/16" x 43 5/8" Right Glass Size: 21 1/16" x 41 7/8" x 3/4"

Right Glass Viewable Size: 20 1/16" x 40 7/8"

Left Screen: 23 1/8" x 44 3/8" Right Screen: 23 1/8" x 44 3/8"

Structural

N/A

ENERGY

ENERGY PERFORMANCE RATINGS

0.28

0.27

ADDITIONAL PERFORMANCE RATINGS Visible Transmittance Condensation Resistance

0.53

61.00

Air Infiltration (cfm/ft2)

<= 0.07

CPD: PRD-N-102-01574-00001

OUOTE INFORMATION

Job: Gocken, Charlie

Tag: Front Lower

Qty: 2

DFTAILS

Endure Window - EN600 Series

604 - 3-Lite Slider (1/4-1/2-1/4)

Exact Size: 91" x 48"

Sash Meeting Rail at Standard Position 1:0"

Double Profile DA Passive Locks

Beige Vent Locks

Beige Hardware

2 Vent Locks

INNERGY Thermal Sash Reinforcement

Extruded Two End Screens (Beige) with BetterVue Screen Mesh

Left Glass:

ComforTech DLA

Single Strength Glass

3/4" IG Thickness

Center Glass:

ComforTech DLA

Double Strength Glass

3/4" IG Thickness

Right Glass:

ComforTech DLA

Single Strength Glass

3/4" IG Thickness

Graphite Foam Insulation


Sill Extender

Sell Price: \$3,310.00 (\$1,655.00 per one)




614-224-2345 2030 Dividend Drive Columbus, OH 43228

Endure EN600 Series 604 - 3-Lite Slider (1/4-1/2-1/4)



OUTSIDE VIEW



INSIDE VIEW

SIZING

Opening Width Range: 72 1/4" to 72 1/2" Opening Height Range: 48 1/4" to 48 1/2"

Window Size: 72" x 48"
United Inches: 120

Egress Size: 30 1/8" x 42 9/16" Egress Size (Fixed Center): 16 9/16" x 42 9/16"

Egress Square Foot: 4.8954 Egress Meets Criteria: No

Left Sash Size: 18 1/16" x 43 5/8"
Left Glass Size: 16 5/16" x 41 7/8" x 3/4"
Left Glass Viewable Size: 15 5/16" x 40 7/8"
Center Sash Size: 33 3/8" x 43 5/8"
Center Glass Size: 31 5/8" x 41 7/8" x 3/4"

Center Glass Viewable Size: 30 5/8" x 40 7/8" Right Sash Size: 18 1/16" x 43 5/8"

Right Glass Size: 16 5/16" x 41 7/8" x 3/4"
Right Glass Viewable Size: 15 5/16" x 40 7/8"

Left Screen: 18 3/8" x 44 3/8" Right Screen: 18 3/8" x 44 3/8"

Structural

N/A

ENERGY ENERGY PERFORMANCE RATINGS

U-Factor (U.S/I-P)

(0.3/1-7)

0.27

Solar Heat Gain Coefficient 0.28

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

Condensation Resistance

0.53

61.00

Air Infiltration (cfm/ft2)

<= 0.07

CPD: PRD-N-102-01574-00001

OUOTE INFORMATION

Job: Gocken, Charlie

Tag: Front Upper

Qty: 2

DETAILS

Endure Window - EN600 Series

604 - 3-Lite Slider (1/4-1/2-1/4)

Beige

Exact Size: 72" x 48"

Sash Meeting Rail at Standard Position 1: 0"

Double Profile DA Passive Locks

Beige Vent Locks

Beige Hardware

2 Vent Locks

INNERGY Thermal Sash Reinforcement

Extruded Two End Screens (Beige) with BetterVue Screen

Mesh

Graphite Foam Insulation

Sill Extender

ComforTech DLA

Single Strength Glass

3/4" IG Thickness

Sell Price: \$3,014.00 (\$1,507.00 per one)

Total: \$25,983.00